


LONG PRODUCTS

STEEL & ALUMINUM

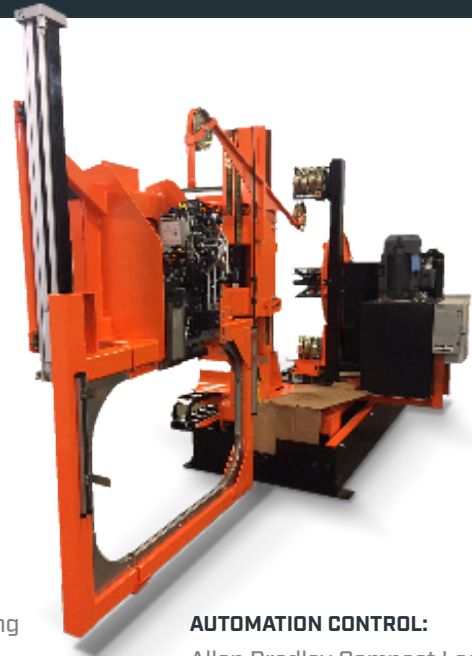

01

SPECIFICATIONS

PACKAGE DIMENSIONS:

- Min/Max Width: 10"-50"
- Min/Max Length: 4'+
- Min/Max Height: 6"-50"

SEAL:

Weld or Crimp

STRAP SIZE:

- Machine Grade Steel Strap 1/2"-1 1/4"x .020"- .031" complete with accumulation tower
- Floating head mount

- Hydraulic off-line indexing maintenance position

- Vertical Sword

MACHINE FUNCTIONS:

All the machine major functions will be powered by heavy duty hydraulic and electric drives where applicable *[i.e. strapping head to package index and maintenance position index via hydraulics]*.

*Note: exact customer requirements to be confirmed at time of order

AUTOMATION CONTROL:

Allen Bradley Compact Logix

OPERATOR INTERFACE:

Allen Bradley Panel-view

POWER REQUIREMENTS:

460 Volt AC, 3 phase, 60 Hz

PNEUMATIC REQUIREMENTS:

Operating pressure: 85psi
consumption 44 cfm, 88 cfm peak [2-3 seconds]

02

UNIQUE FEATURES



HOT & COLD COILS

Ability to strap hot or cold coils.



VERSATILITY

Multiple machines are capable of working in tandem.



STRAPPING HEAD

Single or dual strapping head located either on the top, side or bottom of the machine.



STRAP PLACEMENT

Capable of placing multiple straps.



MACHINE POSITIONING

Possible to have an assortment of positions including online, offline, maintenance position, and inline indexing.

03

CUSTOMIZED TO SUIT YOUR NEEDS

We work with customers to design a machine that will help them succeed. Our commitment to deliver what is needed in a strapping machine, whether it is a custom fit, custom solution or a standard machine, keeps businesses running smoothly and on time.