


SIDE SEAL

WOOD PRODUCTS

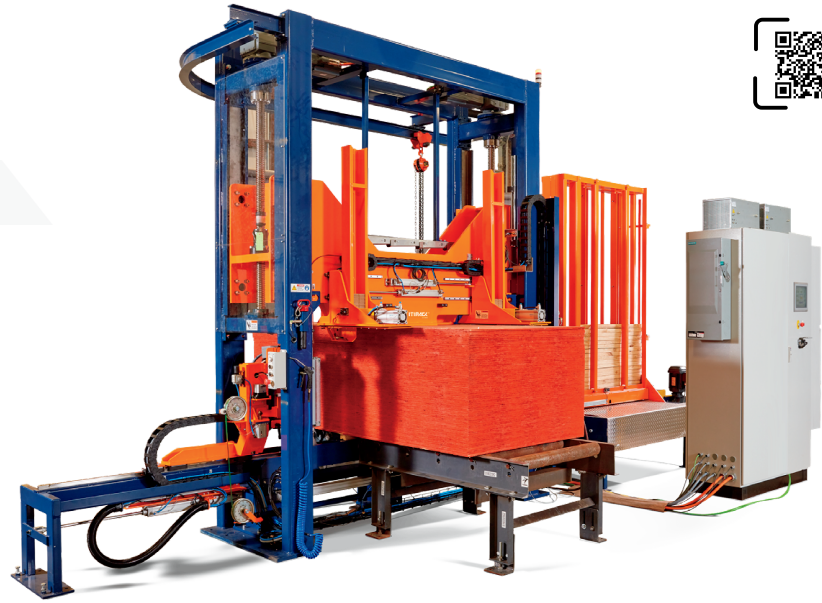

01

SPECIFICATIONS

PRODUCT TO BE STRAPPED

Stacked bundles of Panel products

PACKAGE DIMENSIONS

Min/Max Width; 36" - 49"
Min/Max Length; 8" - 24"
Min/Max Height; 26" - 48"

STRAP DISPENSER

Strapping dispenser
350 lb motorized

TOP COMPRESSION

Max. 12.5 tons / 25,000lbs
Ball Screw with Servo Motor

DUNNAGE FEEDERS

ONE (1) Bottom Dunnage Feeder;
2 magazines.

TOP EDGE PROTECTORS

Dual Magazine

SAFETY FEATURES

Electronic interlock, zero energy state, bypass mode

PLC AND INTERFACE

Allen Bradley/Siemens

02

UNIQUE FEATURES



TOP EDGE PROTECTION
Electric actuators.



STRAPPING HEAD
Plastic strapping head.



TOP AND SIDE COMPRESSION
Fully adjustable



INTEGRATION
Quick and easy integration to new or already installed lines.



MOVEMENTS
Hydraulic or electric



DUNNAGE
Optional robotic pallet feeder.



99% UPTIME



FULLY CUSTOMIZABLE



KEEPS OPERATORS SAFE

03

CUSTOMIZED TO SUIT YOUR NEEDS

We work with customers to design a machine that will help them succeed. Our commitment to deliver what is needed in a strapping machine, whether it is a custom fit, custom solution or a standard machine, keeps businesses running smoothly and on time.



Side Seal Wood Products